

THE GLASS RACKING COMPANY

Innovation by Design

FACTORY AND SITE TRESTLES



The Glass Racking Company range of trestles has been developed for workers in any factory. Our trestles are strong, have adjustable height, optional quality castors, and a non-marking polymer work surface.






GET FULL PRODUCT CATALOGS ONLINE AT
WWW.THEGLASSRACKINGCOMPANY.COM

FACTORY TRESTLES

The Glass Racking Company range of factory trestles has been developed with the glass and window industries to provide options to suit most factory workers. By providing staff with a purpose built work environment the quality and speed of their production is increased.

Key components of The Glass Racking Company factory trestles include :

1. Mild steel construction for strength and durability. The steel is powder coated for appearance and longevity.
2. The top bar of the factory trestles is a T6 aluminum extrusion with an inlayed polymer. This bar is an engineered heavy gauge section for greater strength and load bearing. Both the top and bottom faces of the bar are slotted to take a bolt head, meaning that fittings can be easily secured to any position along the length of the bar, including a sliding fitting underneath. This is typically used for drill and tool holders, units for storage of fasteners, and hooks for rubber beading.
3. The feet of the trestles can have either a rubber foot or quality USA castors, fixed or turning and lockable. The larger trestles have lockdown feet.
4. Standard lengths are 98" and 122". An option for an 18" sliding length extension is available. Other sizes made to order.
5. Height adjustment is from 31" to 38".

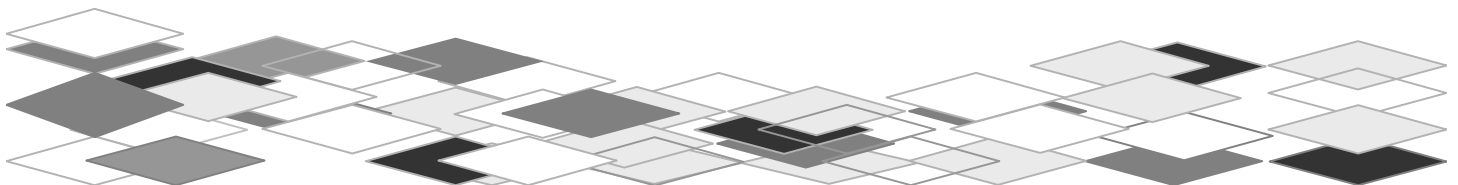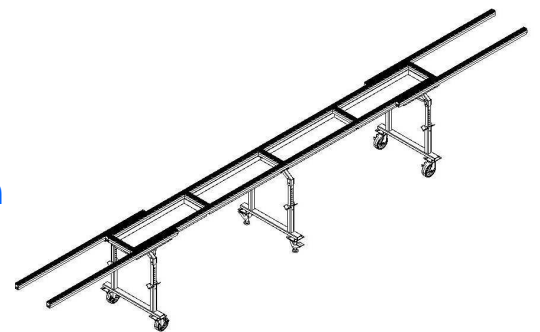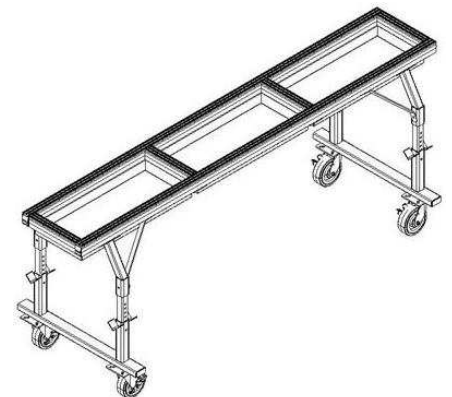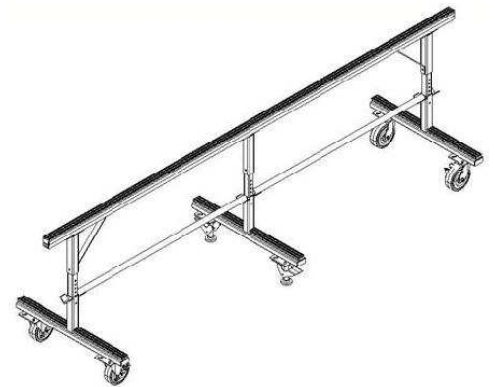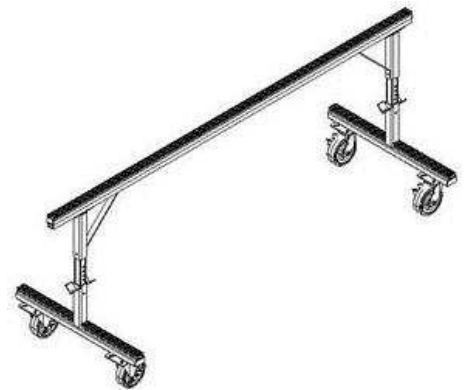


SITE TRESTLES

The Glass Racking Company site trestles have been developed with the glass and window industries to be easily folded for storage and transportation to site, while allowing for adjustment for an uneven work surface onsite. Ease of use is a key benefit of the site trestle.

Key components of The Glass Racking Company site trestles include :

1. Aluminum construction for reduced weight, strength and durability. The hinged support brackets are galvanized mild steel for added strength and durability
2. Assembly onsite is simply achieved with pinned legs that fold into position
3. Storage space is minimised through the folding design of the site trestle
4. The top bar of the site trestle is a T6 aluminum extrusion with an inlayed polymer. The bar is an engineered heavy gauge section for greater strength and load bearing
5. Standard length is 47" with other sizes made to order
6. Height adjustment is from 26" to 38" in five increments

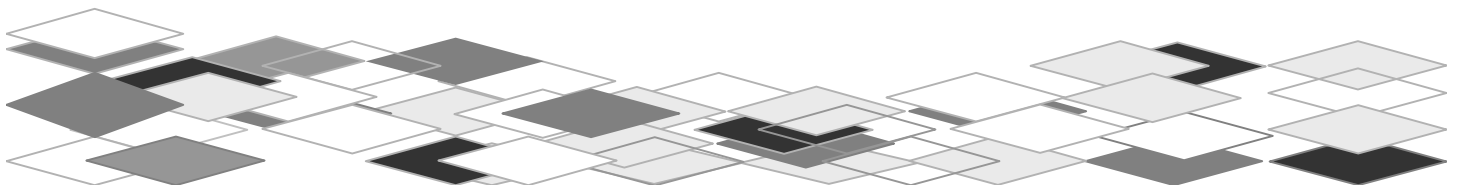

KEY COMPONENTS

The Glass Racking Company factory trestles have either fixed rubber feet or castors. The castors are quality USA 6" castors rated at 1000lbs each. This allows for ease of manoeuvring, for the weight load of a large glazed window, for health and safety, and for longevity.

The uprights of the factory trestles have optional height adjustment to allow for the setting of the work height to suit the user or project.



INLAYED POLYMER BEARING SURFACE

The Glass Racking Company inlayed polymer bearing surface is a soft non-marking work surface developed specifically for the glass and window industries. The surface is ribbed to assist with holding product, and also slightly rounded to assist with shavings and other debris rolling off the work surface to reduce product damage.



TRESTLES

Contact us today to discuss your glass and window factory handling needs.

HOW TO PURCHASE

Contact your local representative in USA and Canada.

USACAN Trestles 4 pager
July 2010



The Glass Racking Company

Seattle :- 206 763 7811 , Vancouver :- 604 970 9181

Email: glass@metalcraft.co.nz www.theglassrackingcompany.com

