

# Product Specifications

## Standard & XL ProFoams

Metalcraft ProFoams are purpose-designed reveal separators that clip firmly onto window and door frames, creating a durable, non-marking buffer between units. Manufactured from closed-cell copolymer with natural spring-back, they compress under load to hold frames securely when poled or strapped into position, minimising movement and transit damage.

**Standard ProFoam** (200 × 80 × 50 mm) fits 19–30 mm reveals and can also clip over aluminium, PVC, and timber extrusions, flanges, and mullion fins. **XL ProFoam** (76 × 76 mm slotting over 38–50 mm material) provides the same ease of use and secure fit at a heavier-duty scale, ideal for doors, sliders, and commercial window suites.

Highly flexible, reusable, and long-lasting, both versions deliver consistent separation, eliminate “settling” during transit, and outperform traditional carpet spacers that often slip or fail under pressure.

## Specifications

- Closed-cell polyolefin copolymer
- Soft, high-grip surface for delicate powder-coated finishes
- Very low water absorption and high UV resistance
- Resistant to abrasive road debris

### Standard ProFoams


- Size: 200 × 80 × 50 mm
- Fits 19, 25, and 30 mm reveals
- 20 mm compressible bearing surface
- Clips over aluminium/PVC/timber profiles
- Can be used over flanges, mullion fins, and extrusions
- Supplied in 200 mm lengths, boxed in sets of 100

### XL ProFoams

- Profile: 76 × 76 mm
- Slot fits 38–50 mm material
- Ideal for doors, sliders, and large commercial suite frames
- Same high-grip, non-marking design as the Standard range

## Options

- Standard ProFoams (200 mm length)
- XL ProFoams for 38–50 mm openings
- Custom lengths available
- DGU/IGU edge-protection variants
- Bulk packaging options

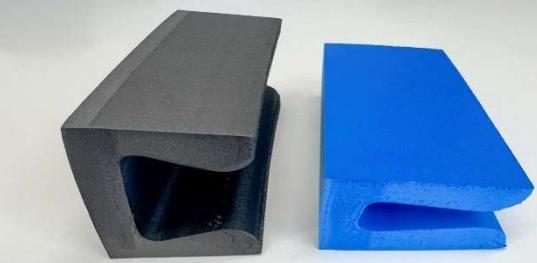

## Key Features

### Soft, Non-Marking Reveal Protection

Closed-cell copolymer provides a soft, non-abrasive buffer that prevents scratching, denting, and surface damage.

### Secure Clip-On Fit Across Multiple Reveal Sizes

Standard fits 19–30 mm reveals; XL fits 38–50 mm openings. Clip firmly over a wide range of aluminium, PVC, and timber profiles.

### High-Compression, Spring-Back Material

The 20 mm-thick bearing surface compresses under load and returns to its original shape, even after long periods, ensuring a long service life with minimal breakage.

### Multi-Use Protection System

Suitable for windows, doors, sliders, commercial suites, and IGU/DGU edge protection.



## Contact Us

500 A Wairakei Road, Harewood,  
Christchurch

Email [info@metalcraft.co.nz](mailto:info@metalcraft.co.nz)

Phone +64 3 360 3373

[metalcraftglassracking.co.nz](http://metalcraftglassracking.co.nz)